

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number  
**WO 00/79055 A1**

(51) International Patent Classification: **E01D 19/06**

(74) Agent: **BROOKS, Nigel**; Hill Hampton, East Meon, Petersfield, Hampshire GU32 1QN (GB).

(21) International Application Number: **PCT/GB00/02224**

(22) International Filing Date: **8 June 2000 (08.06.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
9914186.3 18 June 1999 (18.06.1999) GB  
60/143,820 14 July 1999 (14.07.1999) US

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **VEX-COLT (UK) LIMITED** [GB/GB]; 49 Woolmer Way, Woolmer Trading Estate, Bordon, Hampshire GU38 9QE (GB).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **BURA, Michael, John** [GB/GB]; 2 Ramster Cotts, Ramsnest, Chiddingfold Godalming, Surrey GU8 4SN (GB). **DEVLIN, Seamus, Michael** [GB/GB]; 29 High Street, Buriton, Petersfield, Hampshire GU31 5RX (GB).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **BRIDGE JOINT**

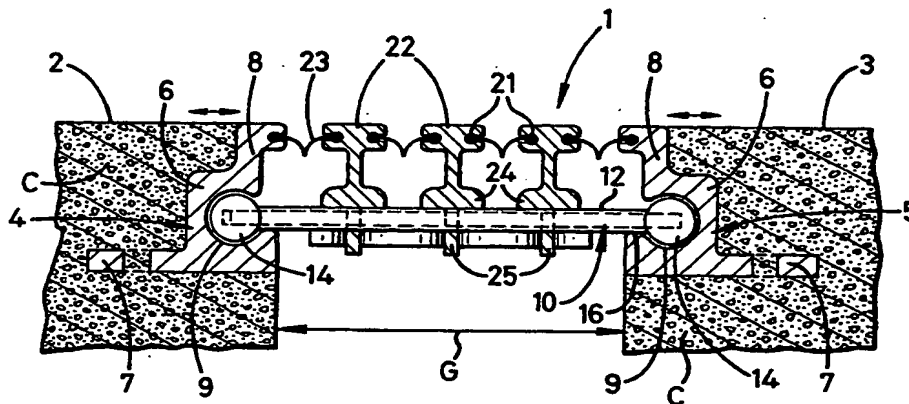

(57) Abstract: The bridge joint (1) has steel edge beams (4, 5) arranged at the edge of the concrete (C) of the roadway sections. Each edge beam has a circular cross section groove (9), which opens towards the gap (G) between the roadway sections and the opposite edge beam. Cross beams (10) are regularly spaced along the length of the joint, i.e. across the width of the roadway. To each end of the crossbeams, a spherical steel ball (14) is fixed, as by welding or pinning. The balls are sized to fit in the groove (9). The crossbeams support a number of intermediate roadway beams (20). They are of general I-beam shape, with small grooves (21) in their heads (22). The edge flanges (8) of the edge beams also have such small grooves (21). Via these a diaphragm seal (23) is connected between each adjacent pair of roadway beams. Feet (24) of the intermediate beams rest on the crossbeams. These transfer road loads to the edge beams via the balls (14) and lips (16) at the lower side of the mouth of the grooves (9). To maintain the intermediate beams (20) evenly spaced, cams (17) are fixed to the underside of the crossbeams (10). They act against lower extensions (25) of the beams (20), the extensions being fitted to the beams after laying of them on the crossbeams.